


# PER-V30C

## Mini PCI Single Channel Video Capture Module

Audio out connector

CVBS In & S-video In & Audio In connector

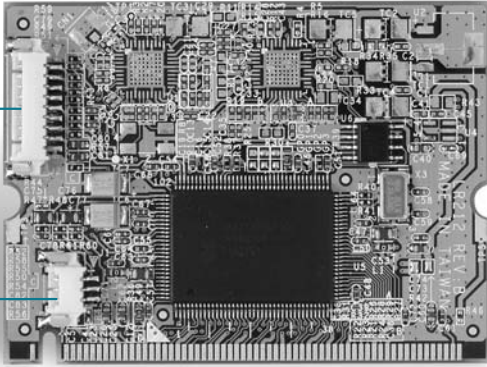

### Specifications

Form Factor	Mini PCI Type III B (44.5mm x 59.6mm)
Video Decoder	Philips SAA7135
Video Input	CVBS & S-Video
Video Format Support	NTSC & PAL
Sample Rate	720 pixels/line
Software Support	Windows® 2000/XP WDM driver for DirectShow based application
Operating Temperature	32°F - 140°F (0°C - 60°C)

### Ordering Information

- **PER-V30C-A10**  
Mini PCI Single Channel Video Capture Module with Philips SAA7135

### Features

- Mini PCI Type III Interface
- Single Channel Video Capture with Philips SAA7135
- NTSC/PAL Video Format Support

# PER-C10C (ADP-232)

## USB to UART Adaptor



### Specifications

Function	USB to UART signal translation
Data Bus	USB2.0 RS-232
Interface	DB9 RS-232 4 pin, single row, 2.54mm (.100 inch) header for USB signals
Form Factor	1.24 inches by 1.86 inches
Environmental	Storage Temperature: -55°C ~ 125°C Operating Temperature: 0°C ~ 70°C Humidity: 5% to 95%

1

Compact Boards

2

SubCompact Boards

3

Embedded Motherboards

4

Media PC

5

PC/104 CPU Modules

6

ETX CPU Modules

7

RISC CPU Module

8

Mini PCI Modules

9

PC/104 Peripheral Modules

10

Full-size SBC

11

Half-size SBC

12

Accessories