
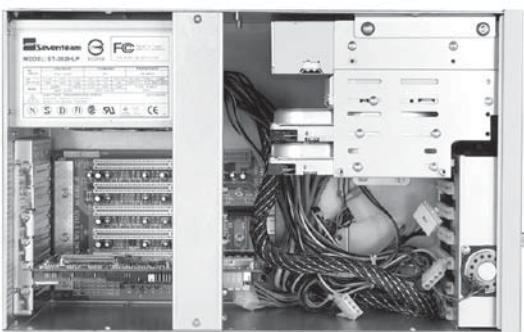
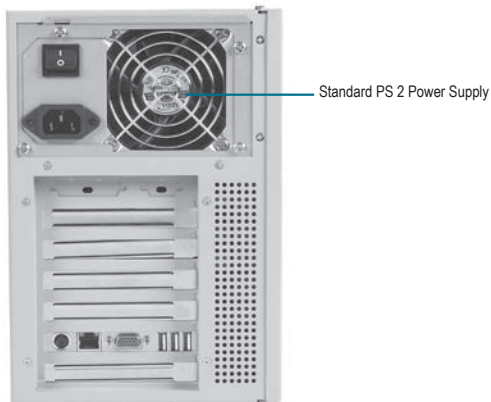


AMC-262

6-slot Wallmount Chassis Full-size / Half-size Cards Supports

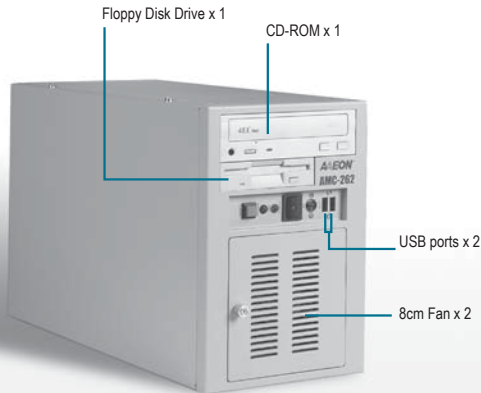

Features


- 6-slot Wallmount Chassis
- Supports 6-slot ISA/ PICMG Bus Passive Backplanes
- Supports Standard PS2 Power Supply Up To 400W
- One Front Panel 3.5" Disk Drive Bay For Floppy Disk Drive
- One Front Panel 5.25" Disk Drive Bay For CD-ROM
- Two Internal 3.5" Disk Drive Bays For Hard Disks
- Two USB Connectors On Front Panel

Specifications

System	
Construction	Heavy-duty steel
Storage	External: One 3.5" Floppy disk drive One 5.25" CD-ROM Internal: Two 3.5" Hard Disks
System Fan	One 8cm Ball Bearing Fan with removable filter
Front I/O panel	Power ON/OFF Switch X 1 Reset Button X 1 Power LED X 1 HDD Active LED X 1 PS2 Keyboard Connector X 1 USB Connector X 2
Rear I/O panel	Reserved cutout for DB-25 connector X 1 Reserved cutout for DB-9 connector X 1
Color	White
Dimensions	6.9" (W) x 16.1" (D) x 10" (H) (175mm x 408mm x 255mm)
Net Weight	12.1 lb (5.5 kg)
Gross Weight	13.9 lb (6.3 kg)
Environmental	
Operating Temperature	32°F ~ 122°F (0°C ~ 50°C)
Storage Temperature	-4°F ~ 176°F (-20°C ~ 80°C)
Operating Humidity	10 ~ 80%
Storage Humidity	10 ~ 80% @ 40°C, non-condensing
Vibration	0.5G / 5 ~ 500Hz / operation 1.5G / 5 ~ 500Hz / no operation
Shock	15G peak acceleration (11 m sec. duration), operation 30G peak acceleration (11 m sec. duration), non operation
EMC	CE/FCC Class A

Dimension

Unit: mm

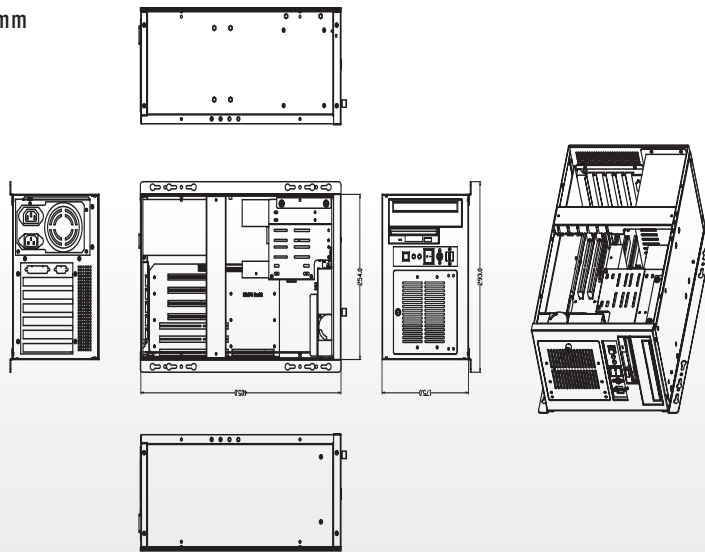

Power Supply Options

P/N	TYPE	PFC Support	Input Voltage	Watt	Size
PW-P300-S-00	AT	Non-PFC	Switch 115/230V	300W	PS2
PW-X250-S-00	ATX	Non-PFC	Switch 115/230V	250W	PS2
PW-X300-S-00	ATX	Non-PFC	Switch 115/230V	300W	PS2
PW-S250-S-00	ATX	Passive PFC	Switch 115/230V	250W	PS2
PW-S250-F-00	ATX	Passive PFC	Fixed 230V	250W	PS2
PW-S300-F-00	ATX	Passive PFC	Fixed 230V	300W	PS2
PW-S350-F-00	ATX	Passive PFC	Fixed 230V	350W	PS2

P/N	TYPE	PFC Support	Input Voltage	Watt	Size
PW-Z300-A-00	ATX	Active PFC	Auto 115-230V	300W	PS2
PW-Z300-A-01	ATX	Active PFC	Auto 100-240V	300W	PS2
PW-Z350-A-00	ATX	Active PFC	Auto 115-230V	350W	PS2
PW-Z400-A-00	ATX	Active PFC	Auto 115-230V	400W	PS2
PW-R400-A-00	ATX	Active PFC	Auto 100-240V	400W Redundant	PS2
PW-R460-A-00	ATX	Active PFC	Auto 100-240V	460W Redundant	PS2

Passive Backplane Options

P/N	Description	Master Interface	Slots	Power Connector, ATX Extend Function
BP-206SG-P4-A11	Wallmount, PICMG, 6-slot Backplane, 4 PCI, 2 ISA, Single Segment, ATX, Rev. A1.1	PICMG	4/2/2 (PCI/ ISA/ PICMG)	AT, ATX, 3-pin ATX extend
BP-206SI-V60	Wallmount, ISA, 6-slot Backplane, 6 ISA, Single Segment, AT, Rev. 6.0	ISA	0/6/0 (PCI/ ISA/ PICMG)	AT
BP-206SP-P4-A10	Wallmount, PCI, 6-slot Backplane, 4 PCI, Single Segment, ATX, Rev. A1.0	PCI	4/0/2 (PCI/ ISA/ PICMG_PCI)	ATX, 3-pin ATX extend
BP-206SA-P4-A10	Wallmount, APCI, 6-slot Backplane, 4 PCI, 1 AGP, Single Segment, ATX, Rev. A1.0	APCI	4/0/1/2 (PCI/ ISA/ AGP/ APCI)	ATX, 3-pin ATX extend
BP-206SS-P4-A11	Wallmount, PCISA, 6-slot Backplane, 4 PCI, 3 PCISA, Single Segment, ATX, Rev. A1.1	PCISA	4/ 1/ 0/ (PCI/ ISA/ APCI)	ATX

CPU Card Options

Model/Name	Description	Remark
HSB-835P	Socket 478 P4 / Celeron® up to 3.2GHz (400/533/800)	
HSB-811P	Onboard Celeron® M (600MHz); Socket 479 Pentium® M (1.2GHz) / Celeron® M (900MHz)	

Ordering Information

Model/Name	Description	Remark
AMC-262-W	Wallmount, 6-slot Bare Chassis, for PS2 Power, PS_SW(ATX), Color: White	

01

Full-size SBC

02

Half-size SBC

03

Industrial Motherboard

04

Industrial Chassis

05

Firewall Platform

06

Industrial Backplanes

07

Daughter Board

08

Embedded Motherboards

09

Mini PCI Modules

10

Sun-readable LCD Monitors

11

Accessories