


PANEL I 5 I-808

15" TFT Powerful-computing Panel Computer w/ Intel® Pentium® 4 Processor



1. SEL-
2. SEL+
3. Backlight on/off

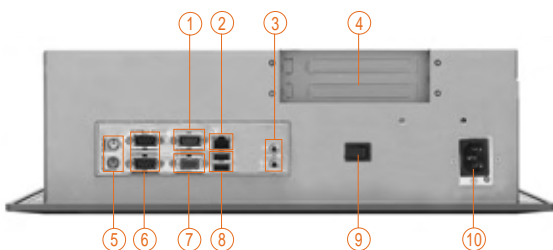

1. COM 1
2. LAN (RJ-45)
3. Mic-in, Lin-out
4. 2 x PCI slots
5. PS/2 x 2 (KB/MS)
6. COM 2 & 3
7. VGA
8. USB 2.0 x 2
9. Power switch
10. AC power

Features

- ▶ Supports Intel® Pentium® 4 or Celeron® D processor
- ▶ Various I/O ports: 2 x USB2.0 and 1 x LAN
- ▶ Supports two PCI slots
- ▶ Supports embedded O.S: Windows® CE.NET and Windows® XP Embedded
- ▶ Supports DC and AC power supply
- ▶ Supports desktop/panel/rackmount



Specifications

LCD Panel	LCD Panel	15" XGA TFT	
	Brightness	260 nits	
	Resolution	1024 x 768 pixels	
	Viewing Angle	Vertical: 100°; Horizontal: 120°	
Main System	Main Board	SBC86808	
	CPU	LGA 775 for Pentium® 4/Celeron® D processor with FSB 533/800 MHz	
	Chipset	Intel® 915GV+ICH6	
	System Memory	2 x 240-pin DDR2 DIMM max. up to 2GB in dual-channel interleaved mode	
	BIOS	Phoenix-Award 4Mbit with RPL/ PXE LAN Boot ROM, SmartView and Customer CMOS backup	
	SSD	CompactFlash™ Type-II socket	
	Watchdog Timer	Reset supported; 255 levels	
	Serial Port	RS-232 x 2	RS-232 / 422 / 485 x 1
			+5V/+12V power output capability by pin 1 and pin 8, selectable via jumper setting

	PS/2 Interface	PS/2 mouse x 1 PS/2 keyboard x 1
	Hard Disk Drive	1 x 3.5" HDD or 2 x 2.5" HDD
	USB	2 x USB ports, USB2.0 compliant
	Ethernet	1 x 10/100Base-T with WOL
I/O Connectors	D-Sub 9-pin x 1 (male) for RS-232 / RS-422 / RS-485	
	D-Sub 9-pin x 2 (male) for RS-232	
	PS/2 x 2 for keyboard and mouse	
	RJ-45 x 1 for Ethernet	
	USB 2.0 connector x 2	
	D-Sub 15-pin x 1 (female) for S-VGA output	
	Line-out/Mic-in	
Power Supply	AC 90~260V, 250W	
Touchscreen	Resistive	
Dimensions	450mm(17.72")(W) x 135.9mm(5.35")(D) x 365mm(14.37")(H)	
Weight	8.8 kg (19.4 lb)	
Environmental	Operation temperature: 0°-45°C (32° -113°F)	
	Relative humidity: 10-95% @ 40°C, non-condensing	
	Operation Vibration: 1.0G, 5~500Hz, random	

Ordering Information

PANEL1151-808	15" TFT powerful-computing panel computer w/ Intel® Pentium® 4 processor
72115102200E*2	P-1151 Rack kit
72115101600E	P-1151 2.5" HDD kit

Optional EOS Installation

Windows® XP Embedded
Windows® CE.NET

Optional OS Installation

Windows® 95/98
Windows® NT/2000/XP

Medical Panel Computer

PANEL2000 Slim Client Panel Computers

GOT Fanless Touch Panel Computers

PANEL 1000/5000 Industrial Panel Computers

Industrial Workstations

PANEL6000 Industrial Flat Panel Monitors



Dimensions

