


# AX61224TM

2U Rackmount Chassis for Extended ATX MB



## Features

- ▶ Supports 12" x 13" server MB (optional Dual Xeon® MB supported)
- ▶ Internal 4 x 3.5" drives
- ▶ Front-accessible one 5.25", one 3.5" and one slim CD-ROM
- ▶ Hot-swap redundant power supply supported

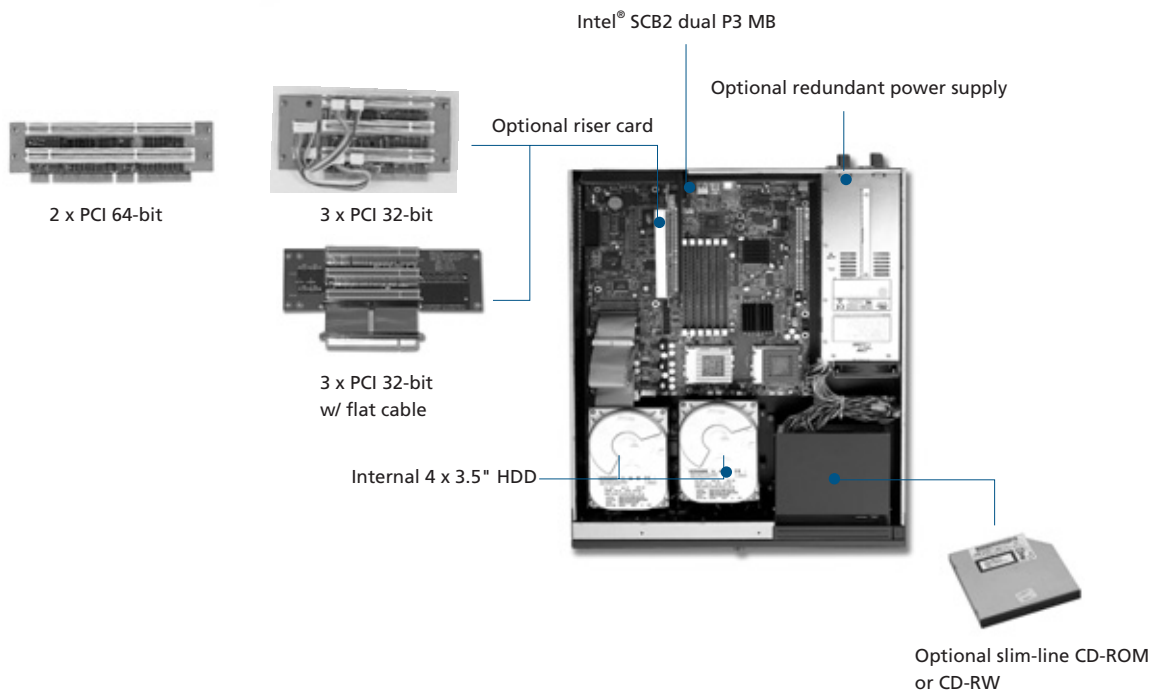

## Specifications

Standard Color	Black
Construction	Heavy-duty cold-rolled steel
Form Factor	12" x 13" server MB
Drive Capacity	Exposed 1 x slim CD, 1 x 3.5" & 1 x 5.25"; internal 4 x 3.5" HDDs
Cooling	Two 8cm ball-bearing fan (41 CFM/each)
Front Panel Indicators	1 x power on/off; 1 x HDD
Front Panel Controls	1 x power on/off; 1 x system reset
Pre-punched Panel	Front: 2 x USB
Optional Expansions	PCI riser card w/ 3-slot 32-bit or 2-slot 64-bit
Speaker	One 0.3W speaker

Operation Temperature Range	0°C (32°F) to 40°C (104°F)
Dimensions (W x D x H)	19" (482.6mm) x 23.3" (590.36mm) x 3.5" (88.9mm)

## Power Supply Options

Items	Specifications		
	Input	Output	MTBF
ATX 300W	AC 115/230V	+5V @ 30A +12V @ 15A -5V @ 0.5A -12V @ 0.5A +3.3V @ 14A +5VSB @ 2.0A	100,000 hours

## Optional Items

PCI 3	3-slot PCI 32-bit riser card
AX96114	3-slot PCI 32-bit riser card w/ flat cable
AX96118	2-slot PCI 64-bit riser card
AX-SLCD	Slim-line CD-ROM
AX-SLCDR	Slim-line CD-RW

## Ordering Information

AX61224TM/X300P	2U rackmount chassis, with ATX 300W power supply with PFC
-----------------	---

## Dimensions

