

P1515

15" Intel Pentium M Slim type Panel PC with Resistive Touch Screen



Features

- Intel Pentium M High performance & Low power CPU
- Support independent dual display (CRT + LCD)
- 4 x High speed USB 2.0 Ports
- 4 x High speed RS-232 Serial Ports
- Support SpeedStep power management (Windows 2k,XP)
- Slim type design
- Internal 2 x 2W Speakers
- RoHS Compliant

System

CPU	Intel Socket 478 Pentium M CPU up to 2.0GHz
Cache	2nd Level depends on CPU
Memory	2 x 184Pin DIMM up to 2GB DDR SDRAM
VRAM	Up to 64MB Shared memory
Chipset	Intel 852GM + Intel ICH4
Watchdog Timer	255-level Reset
System Fan	1 x 4cm/10CFM

I/O

Serial Port	3 x RS-232 ports (COM1/3/4) 1 x RS-232/422/485 port (COM2)
Parallel Port	SPP/EPP/ECP mode
USB Port	4 x USB 2.0 compliant
KB / MS	1 x PS2 K/B and Mouse
LAN	1 x Intel 10/100 base-T Ethernet
Audio	Internal 2 x Speakers(2W) and 1 x line-out
Expansion Bus	1 x Mini PCI socket

LCD Display

Size / Type	15" TFT Color / 1CH 18bit LVDS LCD
Max. Resolution	1024x768, XGA
Pixel Pitch	0.297mm x 0.297mm
Touch Screen	15" Resistive (USB Interface)
Max. Colors	262K
Viewing Angle	160°(H),160°(V)
Luminance (cd/m2)	250
Back Light MTBF	50,000 hours

Storage

HDD / Type	1 x 2.5" HDD bay
Flash Disk	Optional


Power Supply

AC Input	AC Input 90~260V
Output Rating	100W(MAX)
DC Output	DC Output 12V/2A for External Devices

Mechanical & Environmental

Operating Temp.	0 ~ 50°C
Storage Humidity	5 ~ 95% (non-condensing)
Vibration	17 ~ 500 Hz, 1 G PTP
Shock	10G/peak (11m sec)
Construction	Heavy-duty Steel + Aluminum Front Bezel (Optional)
Weight	5.5 kgs
Dimension(WxHxD)	383 x 303 x 65.6 mm
Mounting	VESA-75/100 compatible

Dimensions

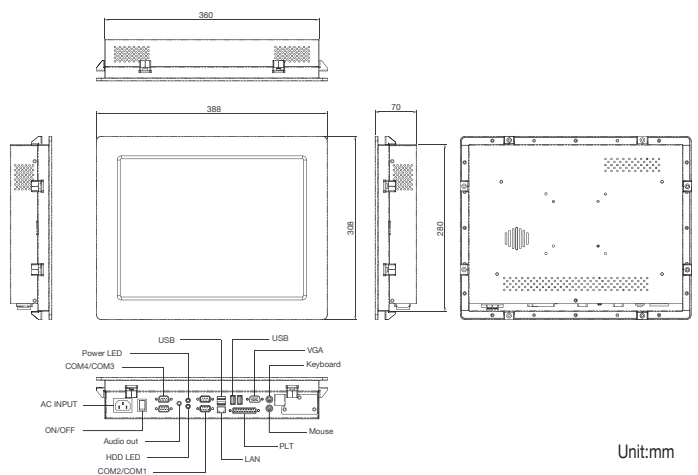

Ordering Information

P1515-2200-A/PM	Panel PC with 15" TFT XGA LCD with Resistive Touch Screen and black Aluminum Front Bezel
P1515-2400-A/PM	Panel PC with 15" TFT XGA LCD with Resistive Touch Screen
ARM-160	LCD Monitor vesatile arm (VESA)
ARM-174	LCD Monitor wallmount Bracket (VESA)